

LarFlex Type 73


Type 73

Sleeve designed to easily slip over existing pipe and is affixed to a pipe with heavy-duty stainless steel clamps. Can be installed in either vertical or horizontal application.

Benefits of the LarFlex Type 73 Rubber Check Valves

- All rubber construction resists abrasive slurries
- NSF61 is standard construction
- Very quiet operation with no water hammer
- Its unique design prevents backflow
- Negligible maintenance and energy costs
- Will not warp or freeze
- Quick interchange with any flap type check valve
- Available in sizes 1" – 96"
- Available with special I.D. to suit concrete pipe.

For Specific Elastomer Recommendations, See:		LAROX "Chemical To Elastomer Guide"				
LAROX Style Number	Cover Elastomer	Tube Elastomer	Max. Operating Temp. °F (°C)		Branding Label Color	F.S.A. Material Class
73/BB	Chlorobutyl	Chlorobutyl	250°	(121°)	Black	STD. III
73/EE	EPDM	EPDM	250°	(121°)	Red	STD. III
73/NH	Neoprene	Hypalon®	212°	(100°)	Green	STD. II
73/NN	Neoprene	Neoprene	225°	(107°)	Blue	STD. II
73/PP	Nitrile	Nitrile	212°	(100°)	Yellow	STD. II
73/NV	Neoprene	Viton®	225°	(107°)	Orange	STD. III

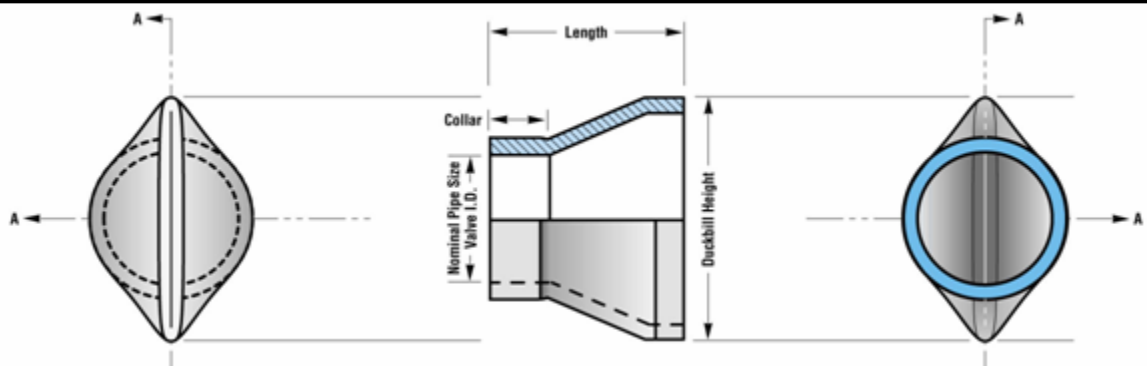

LAROX FLOWSYS INCORPORATED • 808 BARKWOOD COURT, SUITE N • LINTHICUM, MD 21090

TEL. 410-636-2250 • FAX 410-636-9062

E-MAIL INFO@LAROX.FI • WWW.LAROX.US

Information without engagement. All rights to changes without prior notice reserved.



LarFlex Type 73

Nominal Pipe Size Inch / (mm)	Standard Dimensions for Style 73			
	Length	Collar Width	Duckbill Height	Weights
	Inch / (mm)	Inch / (mm)	Inch / (mm)	lbs. / (kgs)
1 (25)	4 (102)	1.000 (25)	2.125 (54)	2 (.9)
1.5 (40)	5 (127)	1.000 (25)	2.625 (67)	4 (1.8)
2 (50)	6.5 (165)	1.500 (38)	3.875 (98)	5 (2.3)
2.5 (65)	7.5 (191)	2.000 (51)	4.625 (117)	8 (3.6)
3 (80)	8.5 (216)	3.000 (76)	5.500 (140)	11 (5.0)
4 (100)	12 (305)	3.000 (76)	7.375 (187)	15 (6.8)
5 (125)	14 (356)	3.000 (76)	8.750 (222)	17 (7.7)
6 (150)	16 (406)	4.000 (102)	10.500 (267)	21 (9.5)
8 (200)	17 (432)	4.000 (102)	13.750 (349)	25 (11.3)
10 (250)	19 (483)	4.000 (102)	17.000 (432)	36 (16.3)
12 (300)	25 (635)	6.000 (152)	19.625 (498)	57 (25.9)
14 (350)	27 (686)	6.000 (152)	24.750 (629)	73 (33.1)
16 (400)	29 (737)	6.000 (152)	26.500 (673)	121 (54.9)
18 (450)	31 (787)	6.000 (152)	29.750 (756)	199 (90.3)
20 (500)	33 (838)	8.000 (203)	31.500 (800)	305 (138.3)
24 (600)	42 (1067)	8.000 (203)	43.000 (1092)	384 (174.2)
28 (700)	44 (1118)	8.000 (203)	46.000 (1168)	455 (206.4)
30 (750)	46 (1168)	10.000 (254)	49.000 (1245)	529 (240.0)
32 (800)	53 (1346)	10.000 (254)	51.000 (1295)	583 (264.4)
36 (900)	58 (1473)	10.000 (254)	55.250 (1403)	625 (283.5)
42 (1050)	61 (1549)	12.000 (305)	66.250 (1683)	910 (412.8)
48 (1200)	72 (1829)	12.000 (305)	74.500 (1892)	952 (431.8)
54 (1350)	74 (1880)	12.000 (305)	78.250 (1988)	1025 (464.9)
60 (1500)	81 (2057)	12.000 (305)	85.000 (2159)	1212 (549.8)
72 (1800)	98 (2489)	14.000 (356)	105.000 (2667)	1362 (617.8)

- Larger sizes available upon request
- Weights are approximate

LAROX FLOWSYS INCORPORATED • 808 BARKWOOD COURT, SUITE N • LINTHICUM, MD
21090

TEL. 410-636-2250 • FAX 410-636-9062
E-MAIL INFO@LAROX.FI • WWW.LAROX.US

Information without engagement. All rights to changes without prior notice reserved.