SITEK

Supply Manifold

SJT - Series

1/4”, 3/8”, 1/2”

SITEK - SUPPLY MANIFOLD (Patented)

The Distribution Manifold for various different uses.

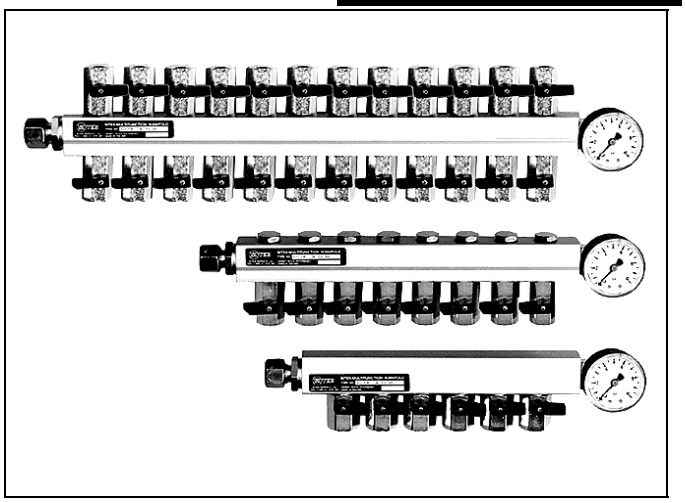

Technical details:

- Suitable for dry or lubricated air.
- Single sided and double sided versions.
- Input 1/2” NPT
- Outputs 1/4, 3/8, 1/2” NPT
- Number of outputs 2 to 30
- Temperature range -30 to 195°F (-20 to 90 ^{O}C)
- Operating pressure max. 240 psi

SUPPLY MANIFOLDS

1/4”, 3/8”	Single sided	SJT1...	Outputs / pcs	2	4	6	8	10	12	15
	Double sided	SJT2...	Outputs / pcs	4	8	12	16	20	24	30
1/2”	Single sided	SJT1...	Outputs / pcs	-	4	6	8	10	12	-

ACCESSORIES

Product		**Type ****	**Description**	**Material**
Manifold Body		SMT	1/2" NPT (with adapter)	Aluminium, anodised
Input Adapter		SMN-1/2 (included)		Brass, nickel plated
Main Shut-Off Valve		* SPV-_ 1/2	1/2” NPT ***	Brass, nickel plated
Bracket		SAJ- 65 SAJ-120	Height 2 1/2" (65 mm) Height 4 3/4" (120 mm)	AISI 316
End Cap				Brass, nickel plated
Output Ball Valve		SPV-N1/4 SPV-N3/8 SPV-N1/2	1/4” FNPT*** 3/8” FNPT*** 1/2” FNPT***	Brass, nickel plated
Assembly Bolt Ass`y	1/4” (Single Sided) 1/4” (Double Sided)	SJP-N1/4 SJP-2xN1/4	1/4” NPT 1/4” NPT	Brass, nickel plated

* Optional

*** The letters **M** and **F** (**F**NPT) mean Male and Female

TYPE CODE

SJT 2 N 12 N - 1/4 - 65

Series
Single sided 1
Double sided **2**
Thread NPT **N**
Thread G / R G
Number of outputs
2 4 6 8 10 **12** 15 16 20 24 30

Bracket height
65 120
Outputs
1/4” 3/8” 1/2”
Ball Valve
N Hand Knob
M Tool operated

McAdoo
Flow-Systems LTD.

Head office:
PO Box 68058
28 Crowfoot Terr. NW
Calgary Ab. T3G 3N8
Tel(403) 547-5002 Fax (403) 547-5009
Info@mcadooflowsystems.com
WWW.mcadooflow systems.com

Edmonton Office:
PO Box 39
Calmar, Ab T0C 0V0
Tel (403) 985-2238 Fax (403) 985-2281

Manufactured by:
SITEK-SERVICE LTD.
Finland